




装配例

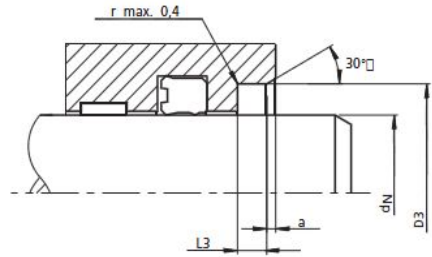

型式例

截面图	材料	温度范围	速度	特点	代号
	NBR FKM PU	-30至100 -20至200 -35至100	1	外骨架紧配合, 刮尘效果好,耐 磨损	F14

尺寸	公差
φ D1	H8
L1	±0.2

d	D	L3	d	D	L3	d	D	L3	d	D	L3	d	D	L3
12	25	7	28	41	7	50	64	8	80	96	8.5	140	160	9
14	27	7	30	43	7.5	55	69	8	85	101	8.5	150	170	9
15	28	7	32	45	7.5	58	72	8	90	106	8.5	160	180	9
16	29	7	35	48	7.5	60	74	8	95	111	8.5	170	190	9
18	31	7	36	49	7.5	63	77	8	100	120	9	180	200	12
20	33	7	38	51	7.5	65	79	8	110	130	9	200	230	12
22	35	7	40	53	7.5	70	84	8	120	140	9	210	230	12
25	38	7	45	58	7.5	75	89	8	130	150	9	220	250	12